

Druckarmaturen DKOS Gerade

Anschluss

Dichtkopf 24° Außenkonus O-Ring-dichtend mit metrischer Mutter S-Reihe

Norm

ISO 8434-1

Anwendung



4SH / R15 / R13 (DN51) Schläuche

Werkstoff

Stahl

Oberfläche

galvanisch verzinkt

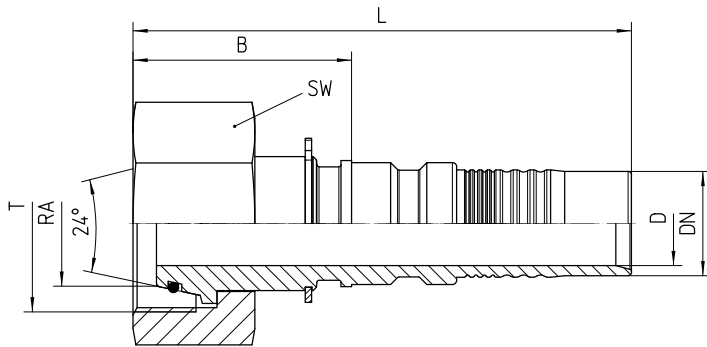

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	B±3 in mm	L±3 in mm	Hinweis
-------------	----------	----	---	----------	--------------	-----------	-----------	---------

7.081-10-10	16	20S	M 30x2.0	36	12	33	84,5	
7.081-12-12/SW41	19	25S	M 36x2.0	41	15	37	93,0	a
7.081-12-12/SW46	19	25S	M 36x2.0	46	15	37	93,0	
7.081-12-16/SW46	25	25S	M 36x2.0	46	17	39	106,0	b
7.081-16-16	25	30S	M 42x2.0	50	20	46	113,0	
7.581-20-16	25	38S	M 52x2.0	60	20	57	126,0	
7.081-16-20	31	30S	M 42x2.0	50	21	45	125,0	b
7.581-20-20	31	38S	M 52x2.0	60	25	62	142,0	
7.581-20-24	38	38S	M 52x2.0	60	30	49	140,0	b
7.081-24-24	38	50S	M 68x2.0	80	30	44	135,0	
7.081-24-32	51	50S	M 68x2.0	80	40	61	152,0	b

Hinweis

a) nicht nach ISO 8434-1, b) Stiftmutterausführung

Zubehör

- O-Ring DKOL/DKOS