

Druckarmaturen DKOS 45°

Anschluss

Dichtkopf 24° Außenkonus O-Ring-dichtend mit metrischer Mutter S-Reihe

Norm

ISO 8434-1

Anwendung


4SH / R15 / R13 (DN51) Schläuche

Werkstoff

Stahl

Oberfläche

galvanisch verzinkt

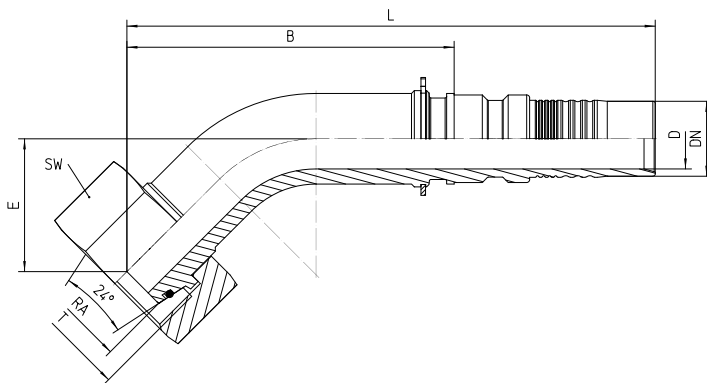

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm	Hinweis

7.085-10-10	16	20S	M 30x2	36	12	30	73	120	
7.085-12-12/SW41	19	25S	M 36x2	41	15	41	92	148	
7.085-12-12/SW46	19	25S	M 36x2	46	15	41	92	148	
7.085-12-16/SW46	25	25S	M 36x2	46	17	48	119	185	b
7.085-16-16	25	30S	M 42x2	50	20	44	108	175	
7.585-20-16	25	38S	M 52x2	60	20	60	151	218	
7.585-20-20	31	38S	M 52x2	60	25	56	143	223	
7.585-20-24	38	38S	M 52x2	60	25	52	154	245	b

Hinweis

a) nicht nach ISO 8434-1, b) Stiftmutterausführung

Zubehör

- O-Ring DKOL/DKOS