

## Druckarmaturen Ringauge Zöllig

### Anschluss

Ringstutzen für BSP Hohlschrauben (G)

### Norm

DIN 7642

### Anwendung


TE / SN / SC / SN-K / PTFE Schläuche

### Werkstoff

Stahl

### Oberfläche

galvanisch verzinkt

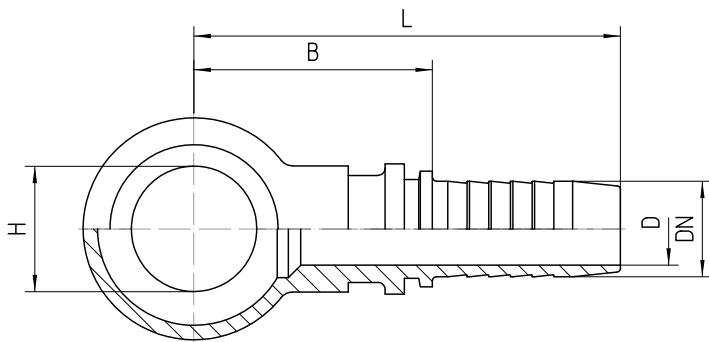

| Bestell-Nr. | DN in mm | zugehörige Hohlschraube - H | H in mm | min.D in mm | B±3 in mm | L±3 in mm |
|-------------|----------|-----------------------------|---------|-------------|-----------|-----------|
|             |          |                             |         |             |           |           |

|                     |    |       |      |      |    |     |
|---------------------|----|-------|------|------|----|-----|
| <b>1.091-1/8-04</b> | 06 | G 1/8 | 10,2 | 3,5  | 30 | 57  |
| <b>1.091-1/4-04</b> | 06 | G 1/4 | 14,2 | 4,0  | 33 | 61  |
| <b>1.091-1/8-05</b> | 08 | G 1/8 | 10,2 | 4,0  | 29 | 57  |
| <b>1.091-1/4-05</b> | 08 | G 1/4 | 14,2 | 5,5  | 33 | 61  |
| <b>1.091-3/8-05</b> | 08 | G 3/8 | 16,8 | 5,5  | 35 | 63  |
| <b>1.091-1/4-06</b> | 10 | G 1/4 | 14,2 | 7,0  | 33 | 63  |
| <b>1.091-3/8-06</b> | 10 | G 3/8 | 16,8 | 7,0  | 35 | 65  |
| <b>1.091-1/4-08</b> | 12 | G 1/4 | 14,2 | 7,0  | 35 | 67  |
| <b>1.091-3/8-08</b> | 12 | G 3/8 | 16,8 | 7,0  | 37 | 69  |
| <b>1.091-1/2-08</b> | 12 | G 1/2 | 21,1 | 10,0 | 42 | 74  |
| <b>1.091-3/8-10</b> | 16 | G 3/8 | 16,8 | 9,0  | 39 | 73  |
| <b>1.091-1/2-10</b> | 16 | G 1/2 | 21,1 | 13,0 | 44 | 78  |
| <b>1.091-3/4-10</b> | 16 | G 3/4 | 26,5 | 13,0 | 47 | 81  |
| <b>1.091-1/2-12</b> | 19 | G 1/2 | 21,1 | 13,0 | 47 | 86  |
| <b>1.091-3/4-12</b> | 19 | G 3/4 | 26,5 | 15,0 | 50 | 89  |
| <b>1.091-1/2-16</b> | 25 | G 1/2 | 21,1 | 13,0 | 50 | 97  |
| <b>1.091-3/4-16</b> | 25 | G 3/4 | 26,5 | 15,0 | 53 | 100 |
| <b>1.091-3/4-20</b> | 31 | G 3/4 | 26,5 | 15,0 | 56 | 111 |
| <b>1.091-1/1-20</b> | 31 | G 1   | 33,4 | 21,0 | 60 | 115 |