

Hydraulic hoses 2 TE

Tube

oil and water resistant synthetic rubber

Reinforcement

several textile netting inserts

Cover


synthetic rubber with oil and water resistance

Temperature

-40°C to + 100°C

Standard

DIN EN 854

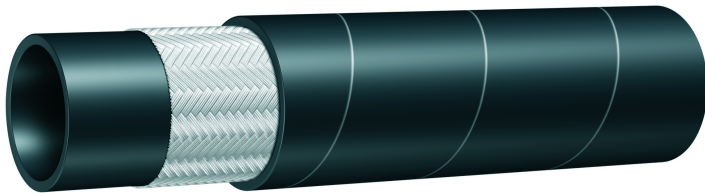

Bestell-Nr.	DN mm	internal Ø in mm	external Ø in mm	working pressure in mm	burst pressure in bar	min.bending radius R in mm	weight in kg/m
05-04	6	6,4	13,4	75	300	40	0,16
05-05	8	7,9	14,3	68	272	50	0,20
05-06	10	9,5	16,5	63	252	60	0,21
05-08	12	12,7	19,7	58	232	70	0,27
05-10	16	15,9	23,9	50	200	90	0,37
05-12	19	19,0	27,0	45	180	110	0,44
05-16	25	25,4	34,4	40	160	150	0,62