

Hydraulic hoses 3 TE

Tube

oil and water resistant synthetic rubber

Reinforcement

several textile netting inserts

Cover


synthetic rubber with oil and water resistance

Temperature

-40°C to + 100°C

Standard

DIN EN 854

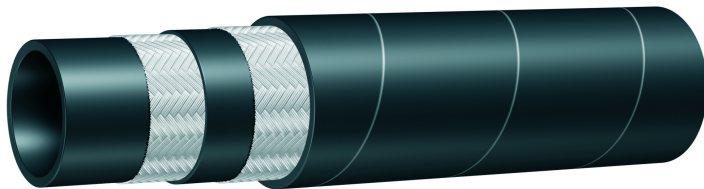

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
06-04	6	6,4	14,4	145	580	45	0,20
06-05	8	7,9	16,9	130	520	55	0,26
06-06	10	9,5	18,5	110	440	70	0,30
06-08	12	12,7	21,7	93	372	85	0,33
06-10	16	15,9	25,9	80	320	105	0,43
06-12	19	19,0	29,0	70	280	130	0,52
06-16	25	25,4	35,9	55	220	150	0,70
06-20	31	31,8	42,3	45	180	190	0,77
06-24	38	38,1	49,6	40	160	240	1,06
06-32	51	50,8	62,3	33	132	300	1,27

Sie haben Fragen? **+49 (36602) 140-140**

