

## Hydraulic hoses 2 SN

### Tube

oil resisnant synthetic rubber

### Reinforcement

2 high tensile steel wire netting

### Cover

synthetic rubber with high abrasion, ozone, weather resistance

### Temperature


-40°C to +100°C

### Standard

DIN EN 853; SAE 100 R2S

### DN 6 bis DN 25

Please use our high-quality hose lines of the 2SC variant for these nominal diameters.

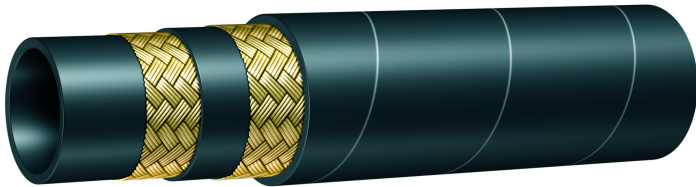

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	reinforcement Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
<b>21-20</b>	31	31,8	48,3	44,5	125	500	420	2,30
<b>21-24</b>	38	38,1	54,6	50,8	90	360	500	2,70
<b>21-32</b>	51	50,8	67,3	63,5	80	320	630	3,50
<b>21-36</b>	60	60,0	71,5	68,8	90	360	650	2,66
<b>21-40</b>	63	63,5	77,5	73,2	70	280	760	3,96
<b>21-48</b>	76	76,2	90,5	87,8	45	180	900	3,18