

Hydraulic hoses 2 SC

Tube

oil resisnant synthetic rubber

Reinforcement

2 high tensile steel wir netting

Cover


synthetic rubber with high temperature, ozone and abrasion resistance

Temperature

-40°C to +100°C

Standard

DIN EN 857

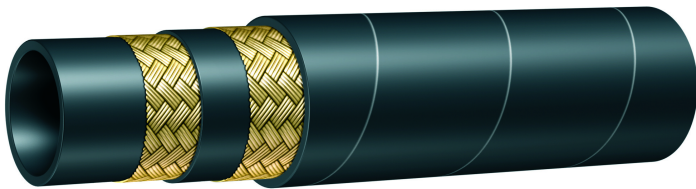

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	reinforcement in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
29-04	6	6,4	14,2	11,2	400	1600	75	0,28
29-05	8	7,9	16,0	12,7	350	1400	85	0,33
29-06	10	9,5	18,3	15,0	330	1320	90	0,42
29-08	12	12,7	21,5	18,3	275	1100	130	0,52
29-10	16	15,9	24,7	21,4	250	1000	170	0,61
29-12	19	19,0	28,6	25,5	215	860	200	0,79
29-16	25	25,4	36,6	33,4	165	660	250	1,10