

Hydraulic hoses 2SN-K

Tube

oil resisnant synthetic rubber

Reinforcement

2 high tensile steel wire netting

Cover


synthetic rubber with high temperature, ozone and abrasion resistance

Temperature

-40°C to +100°C

Standard

is not a subject of any standard, the values from comparable standard of DIN EN 857-2 SC are exceeding

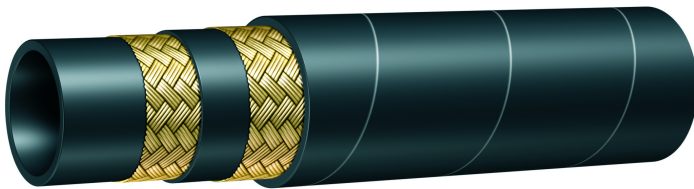

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	reinforcement Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
28-04	6	6,6	13,4	11,4	450	1800	45	0,29
28-05	8	8,3	15,0	13,0	420	1680	60	0,34
28-06	10	9,9	17,0	14,9	385	1540	70	0,44
28-08	12	13,0	20,7	18,7	345	1380	90	0,54
28-10	16	16,4	23,6	21,6	290	1160	130	0,63
28-12	19	19,5	27,7	25,7	280	1120	160	0,84
28-16	25	26,0	35,6	32,9	200	800	210	1,14

Highly abrasion-resistant cover:

- delivery is possible with highly abrasion-resistant cover
- test accordng to EN ISO 6945 after 1 million cycles: no measurable abrasion

Sie haben Fragen? **+49 (36602) 140-140**



your advantage:

- no hose protection necessary
- hose can be used for application under oil

Do you have need for hose lines with highly abrasion-resistant cover? We are looking forward to your inquiry.