

## Hydraulic hoses 3SPC

### Tube

oil resisnant synthetic rubber

### Reinforcement


3 high tensile steel wire netting

### Cover

synthetic caoutchouc with high temperature, ozone and abrasion resistance

### Temperature

-40°C to +100°C ( max. 120°)

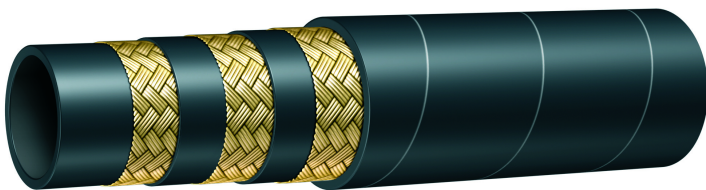

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	reinforcement Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
30-06	10	9,5	21,4	17,0	500	2000	120	0,72
30-08	12	12,7	24,2	20,2	470	1880	160	0,89
30-10	16	15,9	28,1	23,8	410	1640	210	1,07
30-12	19	19,0	31,8	27,8	375	1500	260	1,32
30-16	25	25,4	39,0	34,9	310	1240	310	1,82