

Hydraulic hoses 4 SP

Tube

oil resistant syntetic rubber

Reinforcement

4 high tensile steel spirals

Cover


synthetic rubber with high temperature, ozone and abrasion resistance

Temperature

-40°C to +100°C

Standard

DIN EN 856; SAE 100 R9R

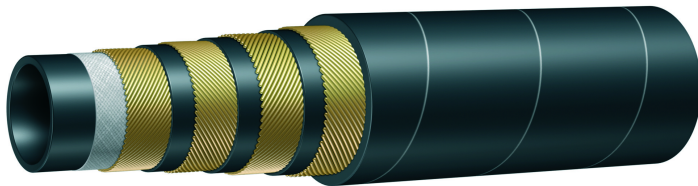

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	reinforcement Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
40-04	6	6,4	17,9	14,7	450	1800	150	0,60
40-06	10	9,5	21,4	17,5	445	1780	180	0,80
40-08	12	12,7	24,6	20,2	415	1660	230	0,95
40-10	16	15,9	28,2	23,8	350	1400	250	1,10

Highly abrasion-resistant cover:

- delivery is possible with highly abrasion-resistant cover
- test according to EN ISO 6945 after 1 million cycles: no measurable abrasion

your advantage:

- no hose protection necessary
- hose can be used for application under oil

Sie haben Fragen? **+49 (36602) 140-140**



Do you have need for hose lines with highly abrasion-resistant cover? We are looking forward to your inquiry.