

Hydraulic hoses 4 SH

Tube

oil resistant syntetic rubber

Reinforcement

4 high tensile steel spirals

Cover


synthetic rubber with high temperature, ozone and abrasion resistance

Temperature

-40°C to +100°C

Standard

DIN EN 856

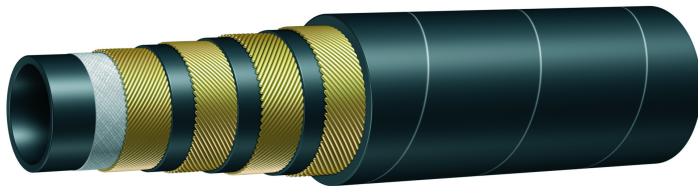

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	reinforcement Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
44-10	16	16,4	28,7	25,0	450	1800	250	1,11
44-12	19	19,0	32,0	28,2	420	1680	280	1,55
44-16	25	25,4	38,0	35,0	380	1520	340	2,15
44-20	31	32,0	45,0	42,0	350	1400	460	2,51
44-24	38	39,0	53,0	49,0	290	1160	560	3,33
44-32	51	50,8	68,0	63,0	250	1000	700	4,60

Highly abrasion-resistant cover:

- delivery is possible with highly abrasion-resistant cover
- test accordng to EN ISO 6945 after 1 million cycles: no measurable abrasion

your advantage:

Sie haben Fragen? **+49 (36602) 140-140**



- no hose protection necessary
- hose can be used for application under oil

Do you have need for hose lines with highly abrasion-resistant cover? We are looking forward to your inquiry.