

Hydraulic hoses R15

Tube

oil resistant syntetic rubber

Reinforcement

4 high tensile steel spirals up to DN 32, DN 40 with 6 spirals

Covering


synthetic rubber with high temperature, ozone and abrasion resistance

Temperature

-40°C to +120°C

Standard

SAE 100 R15

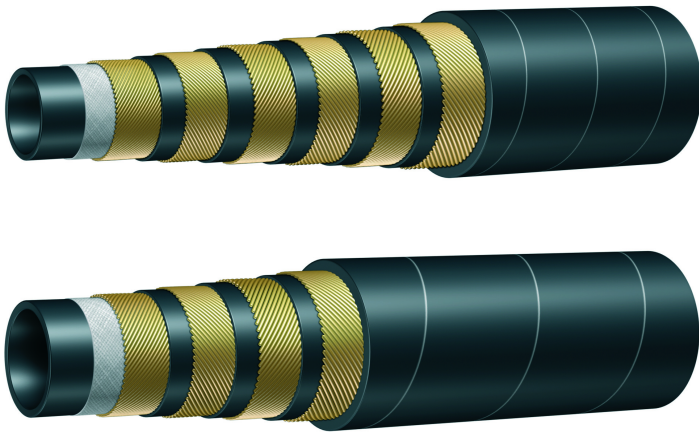

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	reinforcement Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
44-12	19	19,0	32,0	28,2	420	1680	280	1,55
86-16	25	25,4	38,4	35,1	420	1680	330	2,15
86-20	31	31,8	50,0	49,3	420	1680	445	3,98
86-24	38	38,1	57,3	54,0	420	1680	530	5,00