

Hydraulic hoses 6SP 560 / 525 bar

Tube

oil resistant syntetic rubber

Reinforcement


4 high tensile steel spirals up to 32, DN 40 with 6 spirals

Covering

synthetic rubber with high temperature, ozone and abrasion resistance

Temperature

-40°C to +121°C

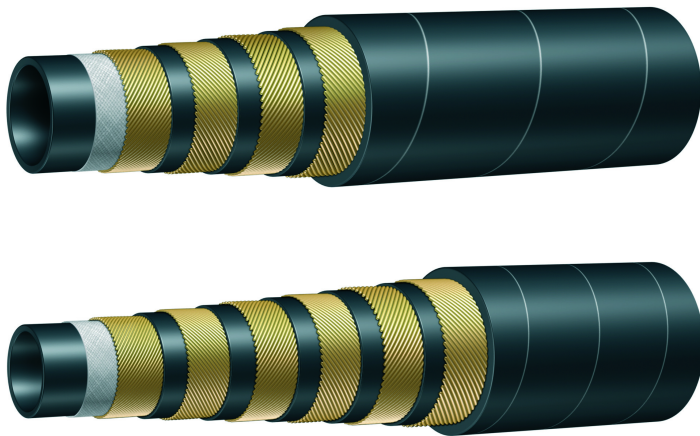

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø max in mm	reinforcement Ø max in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
88-12-4S	19	19,4	32,5	29,4	560	2240	270	1,78
88-16-4S	25	25,7	40,2	37,2	560	2240	300	2,48
88-20	31	32,0	51,2	48,4	525	2100	420	3,59