

Hydraulic hoses FLEXtreme (17A)

Tube

Black smooth synthetic rubber, conductive

Reinforcement


High tensile textile plies and helix wires embedded

Cover

Black, smooth rubber, abrasion, oil, fuel, ozone and weather resistant

Temperature

-40° up to 100°C

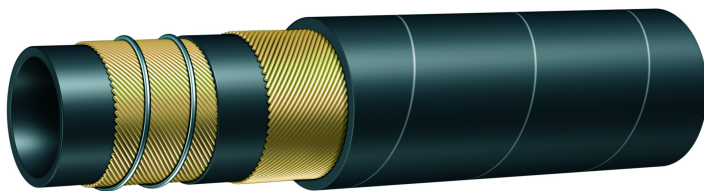

Bestell-Nr.	DN in mm	DN in inch	internal Ø in mm	Tolerance internal Ø in mm	external Ø in mm	negative pressure	working pressure	burst pressure	min. bending radius R in mm	weight in kg/m
17A-12	19	3/4	19	±0,8	29	-1	25	75	38	0,58
17A-16	25	1	25	±0,8	35	-1	20	60	50	0,75
17A-20	31	1 1/4	32	±1,2	42	-1	17	51	64	0,92
17A-24	38	1 1/2	38	±1,2	48	-1	10	30	76	1,07
17A-32	51	2	51	±1,6	61	-1	10	30	102	1,39
17A-36	60	2 3/8	60	±1,6	72	-1	10	30	120	2,10
17A-40	63	2 1/2	63	±1,6	75	-1	10	30	126	2,10
17A-48	76	3	76	±1,6	88	-1	7	20	152	2,60

17A-56	90	3 1/2	90	±1,6	102	-1	7	20	180	3,04
17A-64	102	4	102	±1,6	116	-1	7	20	204	3,41
17A-80	127	5	127	±1,6	143	-0,9	7	20	254	5,53
17A-96	152	6	152	±1,6	168	-0,9	7	20	304	6,81