

Hydraulic hoses

Low pressure Superconductor

Tube

NBR smooth

Reinforcement


2 textile braids and embedded non-kinking steel helix in the conductive layer

Cover

CR black, electrically dissipative

Temperature

-30°C up 90°C (temporarily up 110°C)

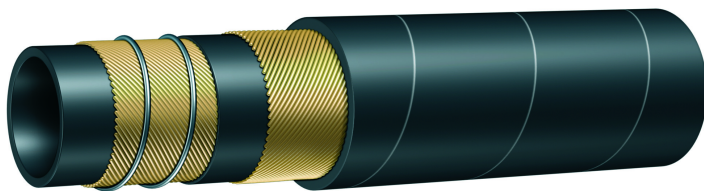

Bestell-Nr.	DN in mm	internal Ø in mm	external Ø in mm	working pressure in bar	burst pressure in bar	min.bending radius R in mm	weight in kg/m
TW-40	63	63	78	16	64	160	2,7
TW-48	75	75	90	16	64	180	3,3
TW-64	100	100	116	16	64	250	4,7
TW-80	125	125	145	16	56	350	7,6
TW-96	150	150	172	16	56	500	9,7
TW-128	200	200	224	16	56	1000	14,9