

## Pressure fittings BES straight

### Connection

Pipe connection for cutting ring coupling S series

### Standard

ISO 8434-1

### Application


TE / SN / SC / SN-K / PTFE flexible tubes

### Material

Steel

### Surface protection

Zinc-electroplated

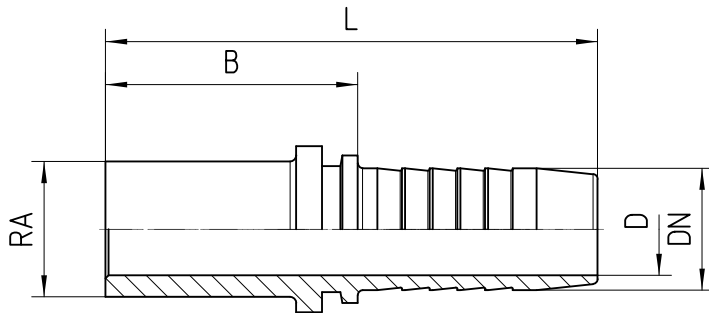

Bestell-Nr.	DN in mm	RA	min. D in mm	B±3 in mm	L±3 in mm
-------------	----------	----	--------------	-----------	-----------

<b>1.123-02-04</b>	06	6S	3,5	34	61
<b>1.123-03-04</b>	06	8S	4,0	34	61
<b>1.123-04-04</b>	06	10S	4,0	36	63
<b>1.123-03-05</b>	08	8S	4,0	30	57
<b>1.123-04-05</b>	08	10S	5,5	30	57
<b>1.123-05-05</b>	08	12S	5,5	32	59
<b>1.123-05-06</b>	10	12S	7,0	32	62
<b>1.123-06-06</b>	10	14S	7,0	37	67
<b>1.123-08-06</b>	10	16S	7,0	37	67
<b>1.123-06-08</b>	12	14S	10,0	36	67
<b>1.123-08-08</b>	12	16S	10,0	38	69
<b>1.123-10-08</b>	12	20S	10,0	53	84
<b>1.123-10-10</b>	16	20S	13,0	38	72
<b>1.123-12-12</b>	19	25S	15,0	41	80
<b>1.123-16-16</b>	25	30S	21,0	47	93
<b>1.123-20-20</b>	31	38S	27,0	39	93