

Pressure fittings DKJ straight

Connection

Sealing head 74° inner cone with UN nut

Standard

ISO 8434-2

Application


TE / SN / SC / SN-K / PTFE flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

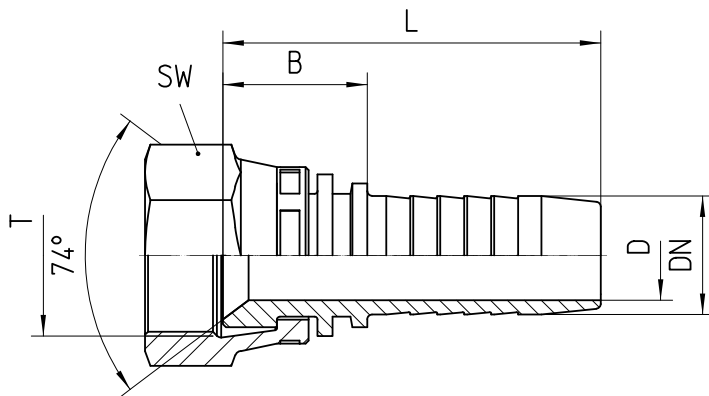

Bestell-Nr.	DN in mm	T in UNF/UN	SW in mm	min. D in mm	B±3 in mm	L±3 in mm
-------------	----------	-------------	----------	--------------	-----------	-----------

1.313-04-04	06	7/16-20	17	4,0	14	42
1.313-05-04	06	1/2-20	17	4,0	15	43
1.313-04-05	08	7/16-20	17	4,0	16	44
1.313-05-05	08	1/2-20	17	5,5	15	43
1.313-06-05	08	9/16-18	19	5,5	16	44
1.313-05-06	10	1/2-20	17	4,0	18	48
1.313-06-06	10	9/16-18	19	7,0	16	46
1.313-08-06	10	3/4-16	24	7,0	17	47
1.313-06-08	12	9/16-18	19	6,0	21	52
1.313-08-08	12	3/4-16	24	9,0	37	69
1.313-10-08	12	7/8-14	27	10,0	36	67
1.313-08-10	16	3/4-16	24	9,0	22	56
1.313-10-10	16	7/8-14	27	12,0	37	71
1.313-12-10	16	1 1/16-12	32	13,0	45	79
1.313-10-12	19	7/8-14	27	12,0	40	79
1.313-12-12	19	1 1/16-12	32	15,0	21	61
1.313-16-12	19	1 5/16-12	38	15,0	22	62
1.313-12-16	25	1 1/16-12	32	15,0	25	71
1.313-16-16	25	1 5/16-12	41	21,0	24	70
1.313-20-16	25	1 5/8-12	55	21,0	48	94
1.313-16-20	31	1 5/16-12	41	21,0	50	104
1.313-20-20	31	1 5/8-12	55	27,0	30	85
1.313-24-20	31	1 7/8-12	60	27,0	47	102

1.313-24-24	38	1 7/8-12	60	32,0	35	93
1.313-32-32	51	2 1/2-12	75	44,5	39	114