

Pressure fittings DKOS 45°

Connection

Sealing head 24° outside cone O-ring sealing with metric nut S series

Standard

ISO 8434-1

Application


4SH flexible tubes


Material

Steel

Surface protection

Zinc-electroplated

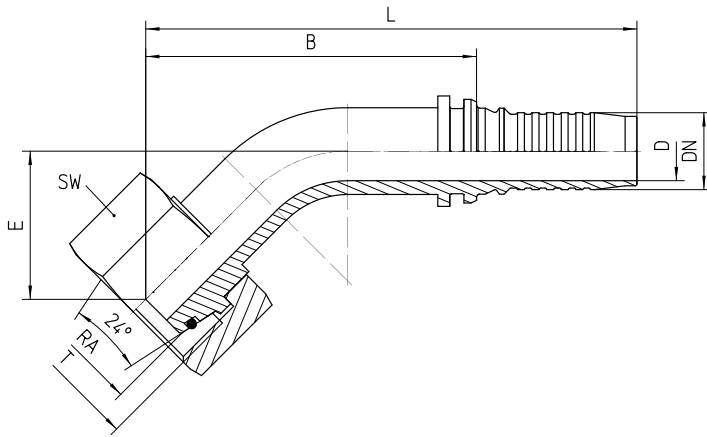

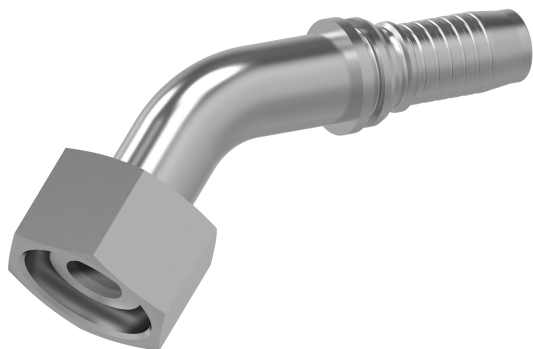

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm	Note
5.085-10-12	19	20S	M 30x2,0	36	13,0	37	81	122	
5.085-12-12/SW46	19	25S	M 36x2,0	46	14,8	36	84	125	
5.085-16-12	19	30S	M 42x2,0	50	14,8	34	77	118	
5.085-12-16/SW46	25	25S	M 36x2,0	46	15,0	40	97	149	*
5.085-16-16	25	30S	M 42x2,0	50	20,0	41	96	148	*
5.085-20-16	25	38S	M 52x2,0	60	20,0	40	97	149	*
5.085-16-20	31	30S	M 42x2,0	50	20,0	58	126	195	
5.085-20-20	31	38S	M 52x2,0	60	25,0	58	126	195	
5.085-20-24	38	38S	M 52x2,0	60	25,0	55	126	195	

Note

* changed outline to improve the safety, therefore measurements differ from standard systems

Sie haben Fragen? **+49 (36602) 140-140**



Accessories

3437309