


Pressure fittings CAT flange straight

Connection
CAT flange

Application
4SH flexible tubes

Material
Steel

Surface protection
Zinc-electroplated

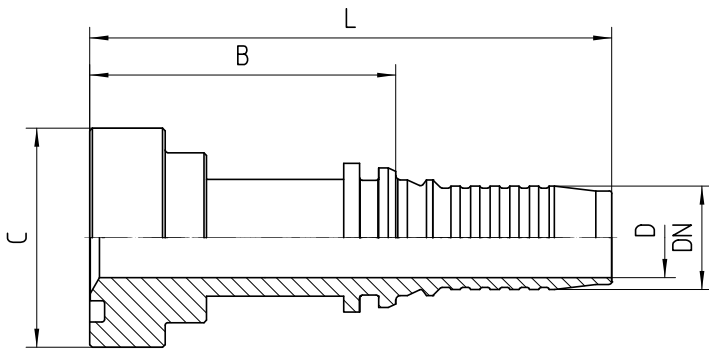

Bestell-Nr.	DN in mm	flange in inch	C in mm	min. D in mm	B±3 in mm	L±3 in mm	Note
-------------	----------	----------------	---------	--------------	-----------	-----------	------

5.426-12-12	19	3/4	41,3	14,8	52	93	
5.426-16-12	19	1	47,6	14,8	51	92	
5.426-12-16	25	3/4	41,3	20,0	58	110	*
5.426-16-16	25	1	47,6	20,0	60	112	*
5.426-20-16	25	1 1/4	54,0	20,0	63	115	*
5.426-16-20	31	1	47,6	23,0	66	135	
5.426-20-20	31	1 1/4	54,0	25,0	67	136	
5.426-24-20	31	1 1/2	63,5	25,0	68	137	
5.426-20-24	38	1 1/4	54,0	23,0	68	137	
5.426-24-24	38	1 1/2	63,5	30,0	69	138	
5.426-24-32	51	1 1/2	63,5	30,0	90	155	

Note

* changed outline to improve the safety, therefore measurements differ from standard systems