


Pressure fittings CAT flange 45°

Connection
CAT flange

Application
4SH flexible tubes

Material
Steel

Surface protection
Zinc-electroplated

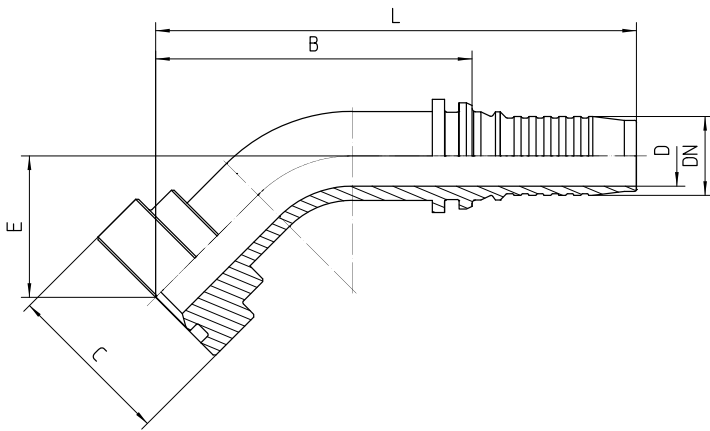

Bestell-Nr.	DN in mm	Flange in inch	C in mm	min. D in mm	E±3 in mm	B±3 in mm	L±3 in mm	Note

5.456-12-12	19	3/4	41,3	14,8	35	78	119	
5.456-16-12	19	1	47,6	14,8	35	78	122	
5.456-12-16	25	3/4	41,3	20,0	59	97	149	*
5.456-16-16	25	1	47,6	20,0	38	96	148	*
5.456-20-16	25	1 1/4	54,0	20,0	38	96	148	*
5.456-16-20	31	1	47,6	23,0	48	119	188	
5.456-20-20	31	1 1/4	54,0	25,0	48	119	188	
5.456-24-20	31	1 1/2	63,5	25,0	55	123	192	
5.456-20-24	38	1 1/4	54,0	23,0	56	119	188	
5.456-24-24	38	1 1/2	63,5	30,0	55	118	187	
5.456-24-32	51	1 1/2	63,5	30,0	57	132	197	

Note

* changed outline to improve the safety, therefore measurements differ from standard systems