

Pressure fittings DKOS straight

Connection

Sealing head 24° outside cone O-ring sealing with metric nut S series

Standard

ISO 8434-1

Application



4SH / R15 / R13 (DN51) flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

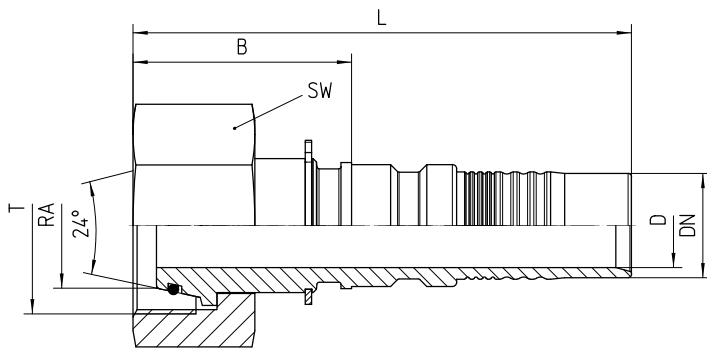

Bestell-Nr.	DN in mm	RA	T	SW in mm	min. D in mm	B±3 in mm	L±3 in mm	Note

7.081-10-10	16	20S	M 30x2	36	12,0	33	84,5	
7.081-12-12/SW41	19	25S	M 36x2	41	15,0	37	93	a
7.081-12-12/SW46	19	25S	M 36x2	46	15,0	37	93	
7.081-12-16/SW46	25	25S	M 36x2	46	17,0	39	106	b
7.081-16-16	25	30S	M 42x2	50	20,0	46	113	
7.581-20-16	25	38S	M 52x2	60	20,0	57	126	
7.081-16-20	31	30S	M 42x2	50	21,0	45	125	b
7.581-20-20	31	38S	M 52x2	60	25,0	62	142	
7.581-20-24	38	38S	M 52x2	60	30,0	49	140	b
7.081-24-24	38	50S	M 68x2	80	30,0	44	135	
7.081-24-32	51	50S	M 68x2	80	40,0	61	152	b

Note

a) not according to ISO 8434-1, b) wire nut

Accessories

3437309