

Pressure fittings DKOS Hammer Drill straight

Connection

Sealing head 24° outside cone O-ring sealing with metric nut S series

Standard

ISO 8434-1

Application



4SH / R15 / R13 (DN51) flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

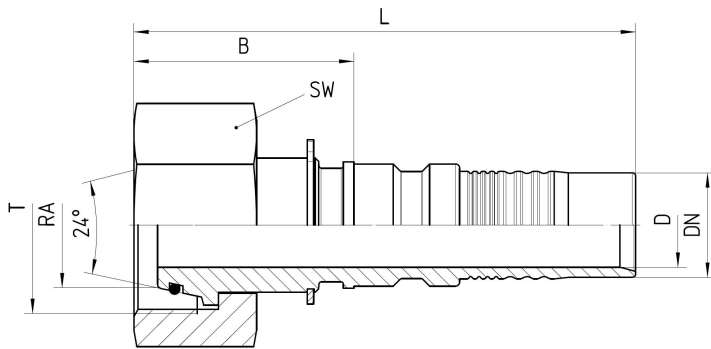

Bestell-Nr.	DN in mm	RA	T in inch	SW in mm	min.D in mm	B±3 in mm	L±3 in mm	Ferrules for 4 SH Order no.	Ferrules for R15 Order no.
-------------	----------	----	-----------	----------	-------------	-----------	-----------	-----------------------------	----------------------------

7.581-12-12/BH	19	25S	M 36x2	46	12,0	50	104	740-12	740-12
7.581-16-16/BH	25	30S	M 42x2	50	17,0	52	121	740-16	740-16
7.581-20-20/BH	31	38S	M 52x2	60	22,0	62	142	740-20	760-20

Accessories

3437309