

Pressure fittings AGR cylindrical straight

Connection

BSPB male thread (G) with 60° inner cone

Standard

ISO 8434-6

Application



4SH / R15 / R13 (DN51) flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

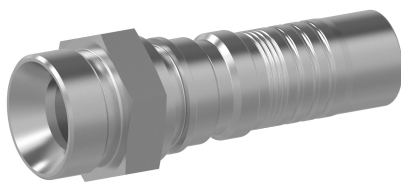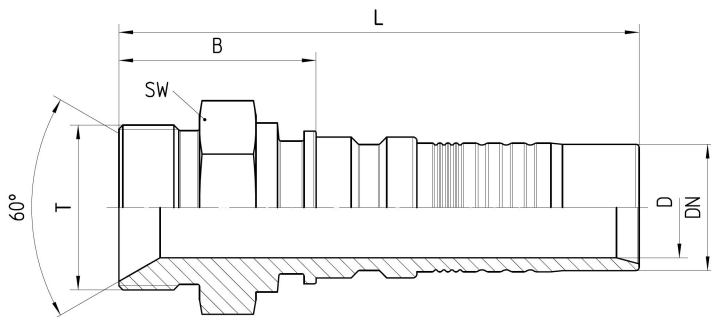

Bestell-Nr.	DN	T in inch	SW in mm	min. D in mm	B±3 in mm	L±3 in mm
7.260-12-12	19	G 3/4	30	15,0	37	93
7.260-16-16	25	G 1	36	20,0	46	112

7.260-20-20	31	G 1 1/4	46	25,0	49	129
7.260-24-24	38	G 1 1/2	55	30,0	51	142
7.260-32-32	51	G 2	65	40,0	57	148