

## Pressure fittings DKOR straight

### Connection

Sealing head 60° outside cone O-ring sealing with BSPP nut (G)

### Standard

ISO 8434-6

### Application



4SH / R15 / R13 (DN51) flexible tubes

### Material

Steel

### Surface protection

Zinc-electroplated

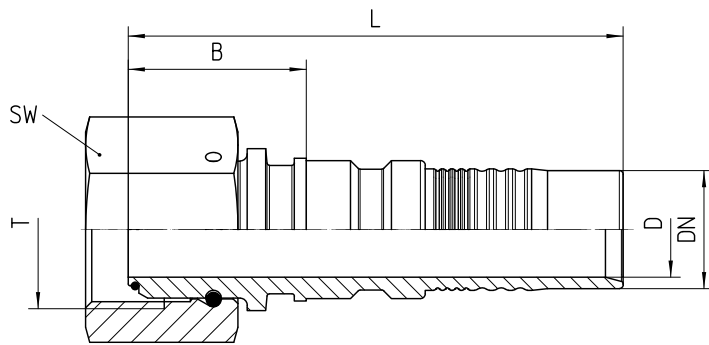

Bestell-Nr.	DN in mm	T in inch	SW in mm	min. D in mm	B±3 in mm	L±3 in mm
-------------	----------	-----------	----------	--------------	-----------	-----------

<b>7.203-12-12/O</b>	19	G 3/4	32	15,0	56	87
<b>7.203-16-16/O</b>	25	G 1	41	20,0	37	104
<b>7.203-20-20/O</b>	31	G 1 1/4	50	25,0	39	119
<b>7.203-24-24/O</b>	38	G 1 1/2	55	30,0	37	129
<b>7.203-32-32/O</b>	51	G 2	70	40,0	91	137