

Pressure fittings DKJ straight

Connection

Sealing head 74° inner cone with UN nut

Standard

ISO 8434-2

Application


4SH / R15 / R13 (DN51) flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

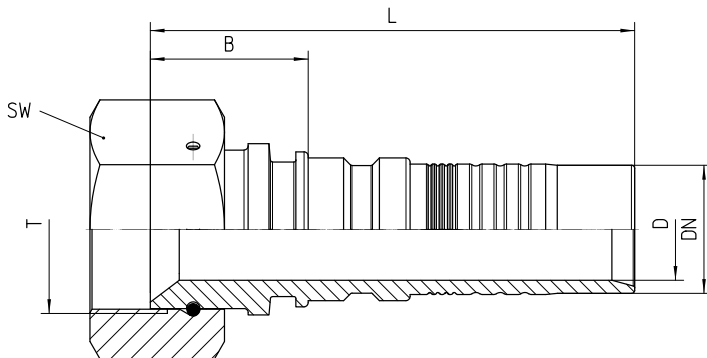

Bestell-Nr.	DN in mm	T in UN	SW in mm	min.D	B±3 in mm	L±3 in mm
-------------	----------	---------	----------	-------	-----------	-----------

7.313-12-12	19	1 1/16"-12	32	15,0	27	83
7.313-16-16	25	1 5/16"-12	41	20,0	30	96
7.313-20-20	31	1 5/8"-12	55	25,0	39	119
7.313-24-24	38	1 7/8"-12	60	30,0	37	129
7.313-32-32	51	2 1/2"-12	75	40,0	46	137