

Pressure fittings AGN straight

Connection

NPT male thread with 74° outside cone

Application



4SH / R15 / R13 (DN51) flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

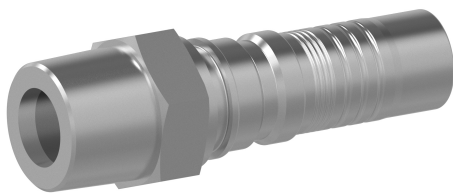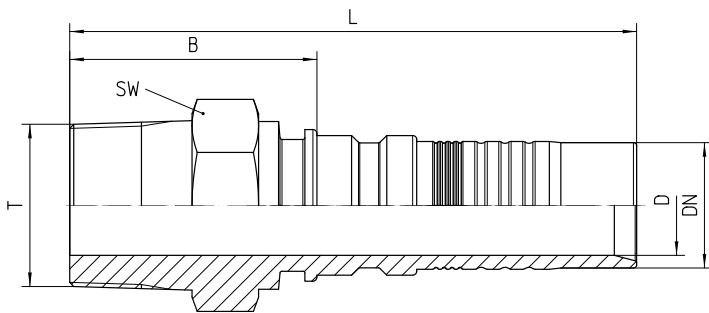

| Bestell-Nr. | DN | T in NPTF | SW in mm | min. D in mm | B±3 in mm | L±3 in mm |
|-------------|----|------------|----------|--------------|-----------|-----------|
| 7.300-12-12 | 19 | 3/4"-14 | 27 | 15,0 | 44 | 100 |
| 7.300-16-16 | 25 | 1" -11.1/2 | 36 | 20,0 | 51 | 118 |

| | | | | | | |
|--------------------|----|---------------|----|------|----|-----|
| 7.300-20-20 | 31 | 1 1/4"-11.1/ | 46 | 25,0 | 62 | 142 |
| 7.300-24-24 | 38 | 1 1/2"-11.1/2 | 55 | 30,0 | 59 | 150 |
| 7.300-32-32 | 51 | 2"-11.1/2 | 65 | 40,0 | 64 | 155 |