

Pressure fittings SFS 90°

Connection

SAE flange 6000PSI (S series)

Standard

ISO 6162-2

Application


4SH / R15 / R13 (DN51) flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

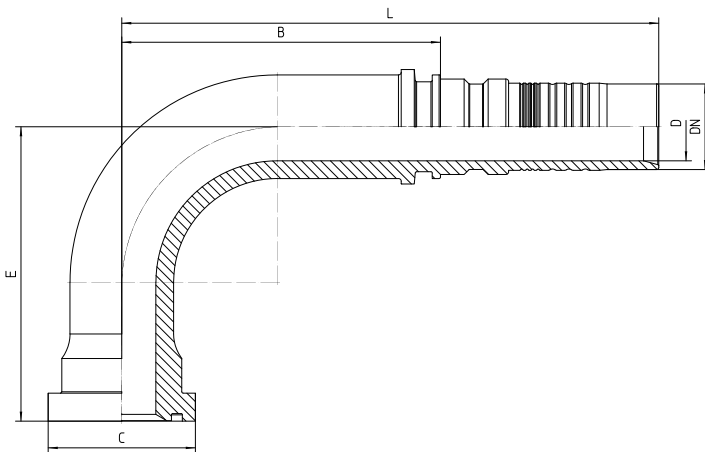

| Bestell-Nr. | DN in mm | flange in inch | C in mm | min. D in mm | E±3 in mm | B±3 in mm | L±3 in mm |
|-------------|----------|----------------|---------|--------------|-----------|-----------|-----------|
|-------------|----------|----------------|---------|--------------|-----------|-----------|-----------|

| | | | | | | | |
|--------------------|----|-------|------|------|-----|-----|-----|
| 7.471-12-12 | 19 | 3/4 | 41,3 | 15,0 | 64 | 71 | 127 |
| 7.471-16-16 | 25 | 1 | 47,6 | 20,0 | 88 | 93 | 160 |
| 7.471-20-16 | 25 | 1 1/4 | 54,0 | 20,0 | 100 | 93 | 160 |
| 7.471-16-20 | 31 | 1 | 47,6 | 25,0 | 96 | 117 | 197 |
| 7.471-20-20 | 31 | 1 1/4 | 54,0 | 25,0 | 108 | 117 | 197 |
| 7.471-20-24 | 38 | 1 1/4 | 54,0 | 30,0 | 115 | 139 | 230 |
| 7.471-24-24 | 38 | 1 1/2 | 63,5 | 30,0 | 117 | 139 | 230 |
| 7.471-32-32 | 51 | 2 | 79,4 | 40,0 | 140 | 133 | 224 |