

Pressure fittings DKOS 90°

Connection

Sealing head 24° outside cone O-ring sealing with metric nut S series

Standard

ISO 8434-1

Application


560 bar flexible tubes

Material

Steel

Surface protection

Zinc-electroplated

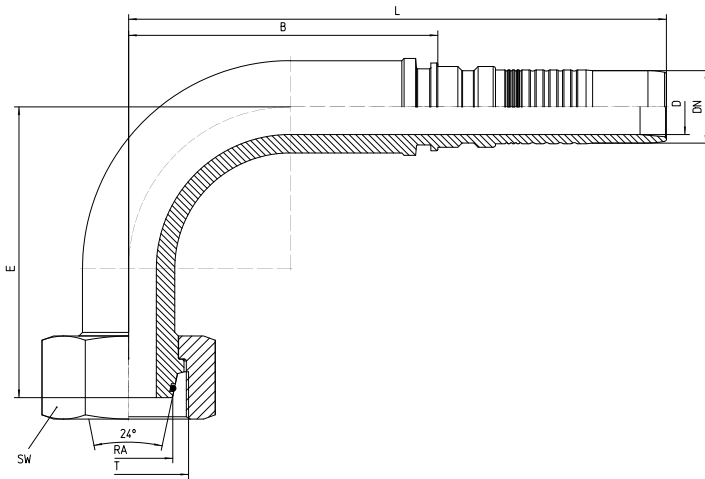

| Bestell-Nr. | DN in mm | RA | T | SW in mm | min. D in mm | E±3 in mm | B±3 in mm | L±3 in mm | working pressure in bar |
|--------------------|----------|------|--------|----------|--------------|-----------|-----------|-----------|-------------------------|
| 8.889-12-12 | 19 | 25 S | M 36x2 | 46 | 14,0 | 76 | 77 | 148 | 560 |
| 8.889-16-16 | 25 | 30 S | M 42x2 | 55 | 19,0 | 122 | 109 | 197 | 560 |
| 8.889-20-20 | 31 | 38 S | M 52x2 | 65 | 24,0 | 131 | 135 | 234 | 525 |