



## Pressure fittings SAE 6000 PSI flange half

### Material

Steel

### Surface protection

Zinc-electroplated

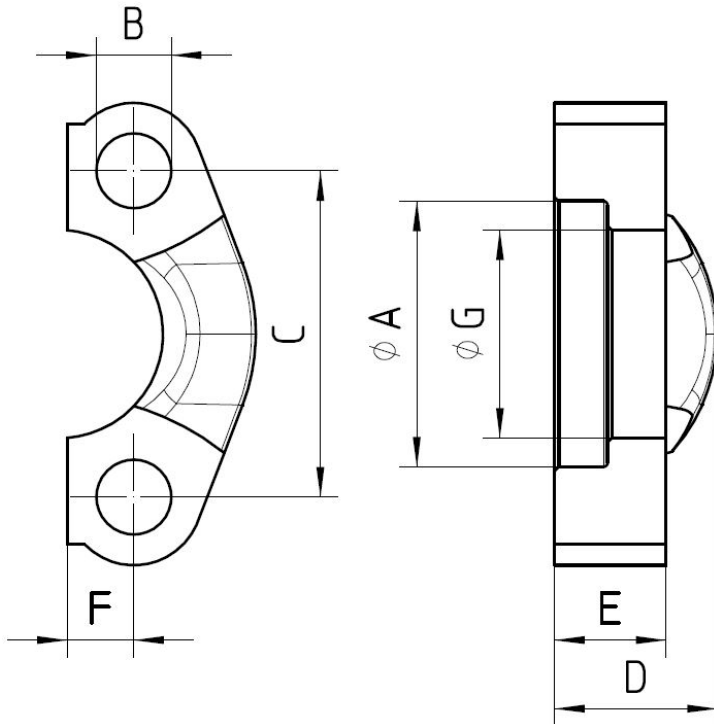

| Bestell-Nr. | old Order | SAE-size in | A in | G in | B in | C in | D in | E in | F in | for bolt |
|-------------|-----------|-------------|------|------|------|------|------|------|------|----------|
|-------------|-----------|-------------|------|------|------|------|------|------|------|----------|

|                | no.      | inch  | mm   | mm   | mm   | mm   | mm | mm | mm   | UNC               |
|----------------|----------|-------|------|------|------|------|----|----|------|-------------------|
| <b>481-001</b> | 481- 8   | 1/2   | 32,5 | 24,6 | 9,2  | 40,5 | 22 | 16 | 8,8  | M 8x30            |
| <b>481-003</b> | 481-12   | 3/4   | 42,1 | 32,5 | 11,9 | 50,8 | 28 | 19 | 11,0 | M 10x35           |
| <b>481-005</b> | 481-16   | 1     | 48,4 | 38,9 | 13,9 | 57,2 | 33 | 24 | 13,0 | M 12x45           |
| <b>481-007</b> | 481-16-l | 1     | 48,4 | 38,9 | 13,9 | 57,2 | 33 | 24 | 12,0 | (7/16 - 1<br>3/4) |
| <b>481-008</b> | 481-20   | 1 1/4 | 54,8 | 44,5 | 15,9 | 66,7 | 38 | 27 | 15,0 | M 14x50           |
| <b>481-010</b> | 481-20-l | 1 1/4 | 54,8 | 44,5 | 15,9 | 66,7 | 38 | 27 | 13,5 | (1/2 - 1<br>3/4)  |
| <b>481-011</b> | 481-24   | 1 1/2 | 64,3 | 51,6 | 18,3 | 79,4 | 43 | 30 | 17,0 | M 16x55           |
| <b>481-013</b> | 481-32   | 2     | 80,2 | 67,6 | 22,2 | 96,8 | 52 | 37 | 21,0 | M 20x65           |