



## Pressure fittings O-ring DIN2690 flat gasket

### Application

for welding neck flanges as DIN2632 PN10, DIN2434 PN25, DIN2635 PN40

### Material

Hecker Centellen WS 3820

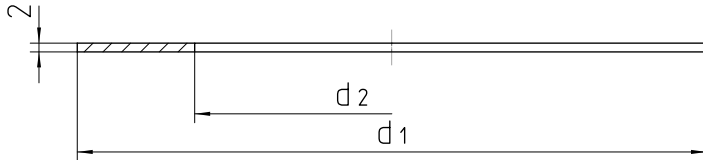

| Bestell-Nr. | DN in mm | nominal pressure PN | d1 in mm | d2 in mm |
|-------------|----------|---------------------|----------|----------|
| FD020-001   | 20       | 10 / 40             | 60       | 28       |
| FD025-001   | 25       | 10 / 40             | 70       | 35       |
| FD032-001   | 32       | 10 / 40             | 82       | 43       |
| FD040-001   | 40       | 10 / 40             | 92       | 49       |

|                  |     |         |     |     |
|------------------|-----|---------|-----|-----|
| <b>FD050-002</b> | 50  | 10 / 40 | 107 | 61  |
| <b>FD065-001</b> | 65  | 10 / 40 | 127 | 77  |
| <b>FD080-001</b> | 80  | 10 / 40 | 142 | 90  |
| <b>FD100-002</b> | 100 | 10 / 16 | 162 | 115 |
| <b>FD125-001</b> | 125 | 10 / 16 | 192 | 141 |
| <b>FD150-002</b> | 150 | 10 / 16 | 218 | 169 |
| <b>FD200-001</b> | 200 | 10 / 16 | 273 | 220 |

**Note**

no-asbestos, water-proof, vapour-proof, oil-proof, and gas-proof ; up to 250 °C  
DIN-DVGW 90.01e103