

# Suction and low-pressure fittings fixed DIN flange 90°


**Connection**  
DIN flange fixed

**Standard**  
DIN 2633/2527 (new: EN1092-1, Typ 11 PN16 and Typ 05 PN16)

**Application**  
14A / 17A flexible tubes

**Material**  
Steel

**Surface protection**  
Zinc-electroplated

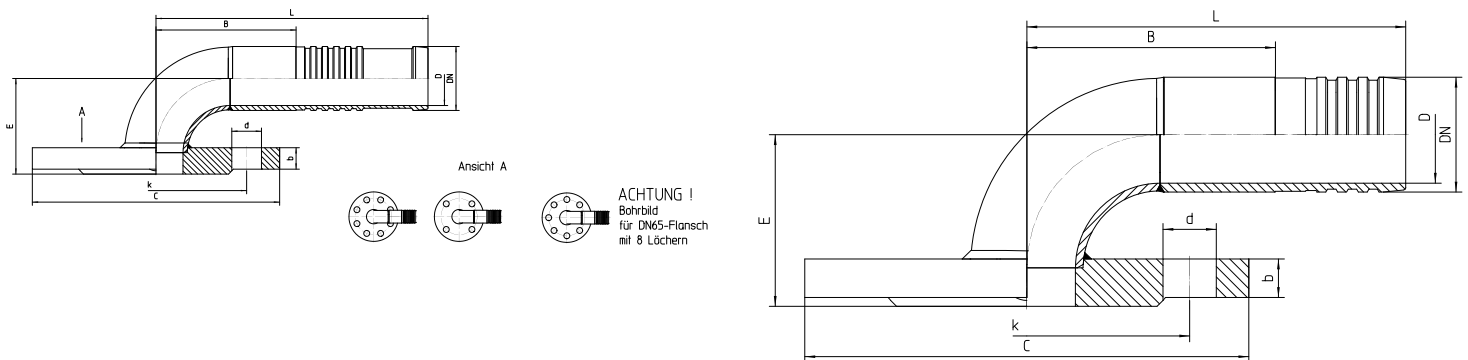

Bestell-Nr.	DN in mm	DN DIN- Flange	C in mm	b in mm	k in mm	number of screws	screws T	d in mm	D in mm	E±3 mm	B±3 in mm	L±3 in mm	Order No.	B±3 in mm	L±3 in mm
17.429-12-12	19	20	105	16 (18)	75	4	M12	14	14	51 (53)	80	160	17.429K- 12-12	76	120
17.429-16-12	19	25	115	16 (18)	85	4	M12	14	14	51 (53)	90	170	17.429K- 16-12	86	130
17.429-12-16	25	20	105	16 (18)	75	4	M12	14	19	51 (53)	59	139	17.429K- 12-16	71	115
17.429-16-16	25	25	115	16 (18)	85	4	M12	14	19	51 (53)	59	139	17.429K- 16-16	81	125
17.429-20-16	25	32	140	16 (18)	100	4	M16	18	19	50 (52)	59	139	17.429K- 20-16	81	125
17.429-12-20	31	20	105	16 (18)	75	4	M12	14	26	51 (53)	75	155	17.429K- 12-20	71	115
17.429-16-20	31	25	115	16 (18)	85	4	M12	14	26	51 (53)	75	155	17.429K- 16-20	71	115

<b>17.429-20-20</b>	31	32	140	16 (18)	100	4	M16	18	26	60 (62)	95	175	17.429K- 20-20	81	125
<b>17.429-24-20</b>	31	40	150	16 (18)	110	4	M16	18	26	62 (64)	95	175	17.429K- 24-20	91	135
<b>17.429-12-24</b>	38	20	105	16 (18)	75	4	M12	14	32	51 (53)	75	155	17.429K- 12-24	71	115
<b>17.429-16-24</b>	38	25	115	16 (18)	85	4	M12	14	32	51 (53)	75	155	17.429K- 16-24	71	115
<b>17.429-20-24</b>	38	32	140	16 (18)	100	4	M16	18	32	60 (62)	85	165	17.429K- 20-24	81	125
<b>17.429-24-24</b>	38	40	150	16 (18)	110	4	M16	18	32	62 (64)	85	165	17.429K- 24-24	81	125
<b>17.429-32-24</b>	38	50	165	18	125	4	M16	18	32	69	101	181	17.429K- 32-24	97	141
<b>17.429-16-32</b>	51	25	115	16 (18)	85	4	M12	14	44	61 (63)	83	175	17.429K- 16-32	90	135
<b>17.429-20-32</b>	51	32	140	16 (18)	100	4	M16	18	44	67 (69)	89	181	17.429K- 20-32	96	141
<b>17.429-24-32</b>	51	40	150	16 (18)	110	4	M16	18	44	80 (82)	91	183	17.429K- 24-32	98	143
<b>17.429-32-32</b>	51	50	165	18	125	4	M16	18	44	82	91	183	17.429K- 32-32	98	143
<b>17.429-40-32</b>	51	65	185	18	145	4 (8)	M16	18	44	94	104	196	17.429K- 40-32	111	156
<b>17.429-16-36</b>	60	25	115	16 (18)	85	4	M12	14	53	68 (70)	86	178	17.429K- 16-36	93	138
<b>17.429-20-36</b>	60	32	140	16 (18)	100	4	M16	18	53	80 (82)	90	182	17.429K- 20-36	97	142
<b>17.429-24-36</b>	60	40	150	16 (18)	110	4	M16	18	53	82 (84)	90	182	17.429K- 24-36	97	142
<b>17.429-32-36</b>	60	50	165	18	125	4	M16	18	53	94	104	196	17.429K- 32-36	96	141
<b>17.429-40-36</b>	60	65	185	18	145	4 (8)	M16	18	53	95	104	196	17.429K- 40-36	111	156
<b>17.429-48-36</b>	60	80	200	20	160	8	M16	18	53	145	123	215	17.429K- 48-36	130	175
<b>17.429-20-48</b>	76	32	140	16 (18)	100	4	M16	18	69	80 (82)	121	213	17.429K- 20-48	128	173
<b>17.429-24-48</b>	76	40	150	16	110	4	M16	18	69	82	121	213	17.429K-	128	173

				(18)						(84)			24-48		
<b>17.429-32-48</b>	76	50	165	18	125	4	M16	18	69	94	124	216	17.429K-32-48	111	156
<b>17.429-40-48</b>	76	65	185	18	145	4 (8)	M16	18	69	113	123	215	17.429K-40-48	130	175
<b>17.429-48-48</b>	76	80	200	20	160	8	M16	18	69	145	123	215	17.429K-48-48	130	175
<b>17.429-64-48</b>	76	100	220	20	180	8	M16	18	69	133	162	254	17.429K-64-48	148	193
<b>17.429-24-56</b>	90	40	150	16 (18)	110	4	M16	18	82	123 (125)	139	231	17.429K-24-56	146	191
<b>17.429-32-56</b>	90	50	165	18	125	4	M16	18	82	118	125	217	17.429K-32-56	140	185
<b>17.429-40-56</b>	90	65	185	18	145	4 (8)	M16	18	82	114	133	225	17.429K-40-56	140	185
<b>17.429-48-56</b>	90	80	200	20	160	8	M16	18	82	135	143	235	17.429K-48-56	150	195
<b>17.429-64-56</b>	90	100	220	20	180	8	M16	18	82	137	143	235	17.429K-64-56	160	205
<b>17.429-32-64</b>	102	50	165	18	125	4	M16	18	94	113	163	255	17.429K-32-64	167	215
<b>17.429-40-64</b>	102	65	185	18	145	4 (8)	M16	18	94	138	163	255	17.429K-40-64	167	215
<b>17.429-48-64</b>	102	80	200	20	160	8	M16	18	94	154	162	254	17.429K-48-64	166	214
<b>17.429-64-64</b>	102	100	220	20	180	8	M16	18	94	155	162	254	17.429K-64-64	166	214
<b>17.429-80-64</b>	102	125	250	22	210	8	M16	18	94	155	162	254	17.429K-80-64	166	214
<b>17.429-64-96</b>	152	100	220	20	180	8	M16	18	142	208	262	390	17.429K-64-96	191	271
<b>17.429-80-96</b>	152	125	250	22	210	8	M16	18	142	212	225	353	17.429K-80-96	233	313
<b>17.429-96-96</b>	152	150	285	22	240	8	M20	22	142	238	249	377	17.429K-96-96	244	324
<b>17.429-128-96</b>	152	200	340	24	295	12	M20	22	142	240	248	376	17.429K-128-96	246	326

Sie haben Fragen? **+49 (36602) 140-140**



**Note**  
deviating measurements when En flanges are used